## FieldSmart Small Count Delivery (SCD)



## Outdoor/Indoor Wall Box - Enclosure for Clearview xPAK-



### **Application**

- Fiber Demarcation
- Entrance Facilities
- Security Systems (CCTV)
- MDU (Multi-Dwelling Units) applications
- FTTP internal drop box
- · Business Class Services

- RFoG scenarios
- · Traffic monitoring/ DOT
- Telecommunication Room
- Power/Wind farm applications
- · Cell Backhaul

### **Description**

Ideal for any small-count "landed" fiber scenarios where 2,4, or 6 fibers are required in a discrete footprint without sacrificing fiber management. Optimized for use with the Clearview xPAK.

#### **Features & Benefits**

#### Integrity

- · Utilizing the Clearview xPAK, it supports industry standard SC and LC singlemode connectors
- Dual snap locks to ensure lid seals to base
- · Mounting hole pattern for multiple applications

#### Protection

- · Radius protected storage for up to 15 feet of buffer tube
- NEMA 4 rated
- Security screw with ability to secure with padlock
- · Gasket seal
- Ground lug included

#### Access

- Small design facilitates ease of use in crowded environments
- Easy to install with both internal and external mounting holes
- (2) bottom entry / exit points


#### Investment

- · Patch and splice or patch only
- Surface or pole mount capable
- Flame retardant PVC for durability

# FieldSmart Small Count Delivery (SCD)



## Outdoor/Indoor Wall Box - Enclosure for Clearview xPAK -

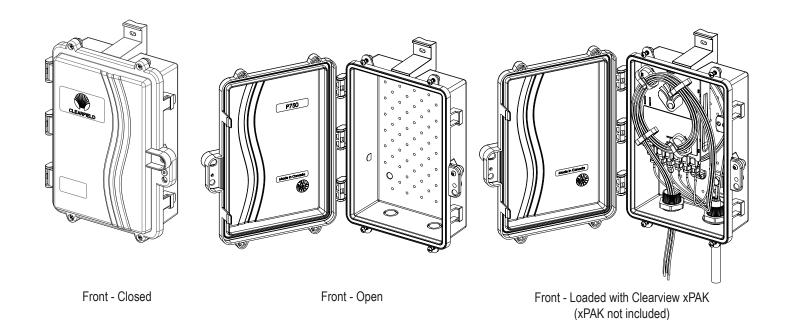

### **Dimensions**

	Width	Length	Depth
External	9"	12"	4"
Internal	6"	9"	2.25"

## **Pre-configured Part Numbers**

Part Number	Description	
FDP-xWB1	Small wall box with 1 fitting	
FDP-xAK1	Optional accessory Kit (Includes 1 fitting and 2 strength member clamps)	