


ezSPAN® ADSS | Long Span All-Dielectric Self-Support Loose Tube Cable

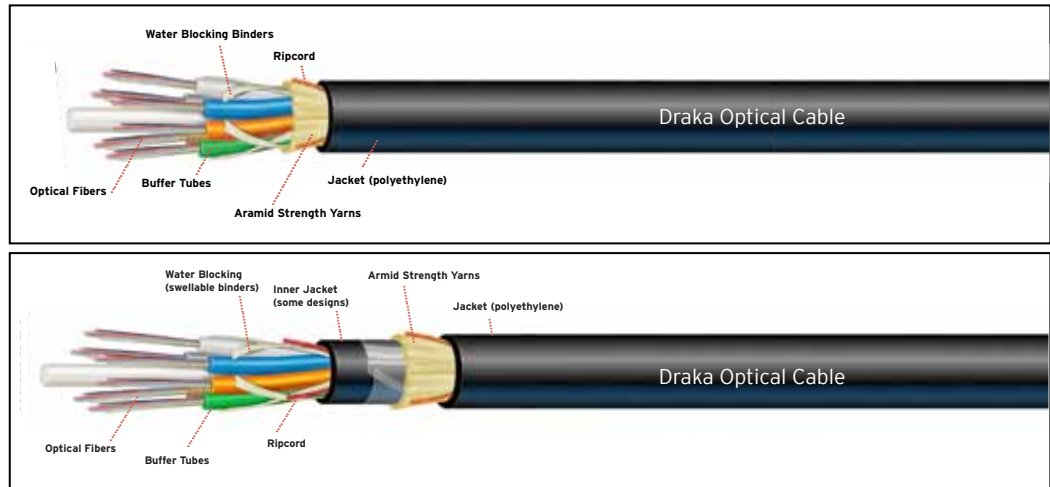

Product Snapshot

Applications	Self-Supporting Aerial Deployment for Communications & Power Transmission Space
Constructions	All-Dielectric Round - Typical Span Lengths up to 2,500' (760m), Single & Dual Jacket
Fiber Count	2 to 288 fibers in Color-coded Buffer Tubes
Fiber Types	Single-mode (ESMF, BendBright®, BendBright-XS, NZDSF-LA, Terallight®) / Multimode / Hybrid
Options	Track Resistant Jacket. SafeStrain or ZeroStrain designs
Performance	IEEE 1222-2011, ANSI / ICEA 640, IEC, RUS 7 CFR 1755 (RUS LISTED), Telecordia GR-20 IEC 60794-4-20

All-Dielectric Self-Support (ADSS) fiber cable for up to 2500' (760m) spans common in transmission.

Draka's ezSPAN ADSS | Long Span version provides reliable self-support performance for up to 2,500 feet (760 meters). Each ezSPAN ADSS cable is custom engineered for optimum placement on utility towers and to operate under full weather load, ensuring safe reliable lifetime performance. For installation on high-voltage lines up to 275 kV, an optional track-resistant jacket prevents dry-band arcing damage. Available up to 288 fibers, cables greater than 72 fibers utilize a 24 fiber per tube design to reduce environmental load (12 fibers per tube design also available for fiber counts of 84-144).

Features & Benefits

Proven Long Span Installation & Use

- Tailored designs span distances up to 2,500' (760 m) without interrupting power
- Higher count designs utilize 24 fiber per tube to reduce environmental load
- Matching pole attachment hardware (dead-ends, suspension clamps)

(Continued on next page)

Content may be subject to change without notification

RUS
Listed

DS063 11/10/2011-VZ

Value Innovation for your Next Generation Access Network

Draka Communications Americas
2512 Penny Road | Claremont | North Carolina 28610-0039
800.879.9862 | International 828.459.8895 | sales@drakaamericas.com

Features & Benefits (cont.)

Easy Cable Entry & Preparation

- Ripcord speeds cable entry & outer jacket removal
- Swellable binders speed cable preparation
- Available BendBright bend-tolerant single-mode fiber
- 2.6mm tube with 12 fibers per tube; 3.0mm tube with 24 fibers per tube

Reliable Lifetime Performance

- Custom engineered for operation under full load
- Available with zero fiber strain at the maximum rated cable load (MRCL) or with a safe strain design limiting fiber strain to 0.20%.
- Optional track-resistant jacket prevents dry-band arching damage for line voltages ≤ 275 kV (≤ 25 kV space potential)
- Guaranteed standards-based performance
- Exclusive ColorLock[®] fiber coating (single-mode) for permanent embedded color & long-term performance

Minimum Bend Radius

- with load: 20x cable diameter
- no load: 10x cable diameter

Temperature Range

- Shipping and Storage -40° F to +167° F (-40° C to +75° C)
- Installation -22° F to +140° F (-30° C to +60° C)
- Operation -40° F to +158° F (-40° C to +70° C)

PLP Attachment Hardware

- Dead-ends indicated are Limited & Medium Tension dead-ends. The Limited Tension dead-end is designed for a maximum long-term tension of 1000 lbs and short-term tension of 2500 lbs. The Medium Tension dead-end is designed for 2000 lbs for long-term tensions and 4000 lbs. for short-term loads. Limited tension dead ends are limited to a maximum span length of 600 feet. Semi-high or high tension dead-ends should be used for higher tension ratings.
- C1E1 designates thimble clevis and extension link (recommended).
- Aluminum Suspension is designed for in-line support with a maximum angle change of 20° and a maximum span of 600 feet. Spans of ≥ 600 to 1200 feet require reinforcing rods (SSR).
- The "S" designates anchor shackle and eye-nut (recommended).
- Vibration dampers are recommended.
- Aluminum Support is designed for in-line support with a maximum angle change of 20° and a maximum span of 600 feet.

Value Innovation for your Next Generation Access Network

Draka Communications Americas
2512 Penny Road | Claremont | North Carolina 28610-0039
800.879.9862 | International 828.459.8895 | sales@drakaamericas.com

**Single HDPE Jacket (without track resistance) SafeStrain Design
NESC Light Load**

ADLS

6-72 fibers Short Span ADSS design is recommended

84 to 144F

Span Distance (ft)	Cable Part Number	Maximum Rate Cable Load (MRCL) (lbf)	Cable OD (inches)	Installation Load (lbf)	Installation Sag	Dead End	AI Support span < 600 ft	AI Suspension w/o SSR (< 600 ft)	AI Suspension with SSR
≤ 600	ADLS1025-24-ES-XXX	1025	0.492	491	1.5	2872004C1E1	4450100	4450200S	4470200S
700	ADLS1025-24-ES-XXX	1025	0.492	491	1.5	2872100C1E1	4450100	4450200S	4470200S
800	ADLS1115-24-ES-XXX	1115	0.494	565	1.5	2872100C1E1	4450100	4450200S	4470200S
900	ADLS1295-24-ES-XXX	1295	0.498	644	1.5	2872100C1E1	4450100	4450200S	4470200S
1000	ADLS1425-24-ES-XXX	1425	0.501	723	1.5	2872100C1E1	4450100	4450200S	4470201S

156 to 216F

Span Distance (ft)	Cable Part Number	Maximum Rate Cable Load (MRCL) (lbf)	Cable OD (inches)	Installation Load (lbf)	Installation Sag	Dead End	AI Support span < 600 ft	AI Suspension w/o SSR (< 600 ft)	AI Suspension with SSR
≤ 500	ADLS1025-24-ES-XXX	1025	0.616	500	1.5	2872008C1E1	4450102	4450202S	4470202S
600	ADLS1115-24-ES-XXX	1115	0.618	603	1.5	2872008C1E1	4450102	4450202S	4470202S
700	ADLS1295-24-ES-XXX	1295	0.621	709	1.5	2872104C1E1	4450102	4450202S	4470202S
800	ADLS1475-24-ES-XXX	1475	0.624	818	1.5	2872104C1E1	4450102	4450202S	4470202S
900	ADLS1655-24-ES-XXX	1655	0.626	928	1.5	2872104C1E1	4450103	4450203S	4470203S
1000	ADLS1835-24-ES-XXX	1835	0.629	1040	1.5	2872104C1E1	4450103	4450203S	4470203S

228 to 288F

Span Distance (ft)	Cable Part Number	Maximum Rate Cable Load (MRCL) (lbf)	Cable OD (inches)	Installation Load (lbf)	Installation Sag	Dead End	AI Support span < 600 ft	AI Suspension w/o SSR (< 600 ft)	AI Suspension with SSR
≤450	ADLS1025-24-ES-XXX	1025	0.743	608	1.5	2872011C1E1	4450104	4450204S	4470205S
500	ADLS1155-24-ES-XXX	1155	0.745	678	1.5	2872011C1E1	4450104	4450204S	4470205S
600	ADLS1385-24-ES-XXX	1385	0.748	820	1.5	2872011C1E1	4450105	4450204S	4470205S
700	ADLS1605-24-ES-XXX	1605	0.751	965	1.5	2872107C1E1	4450105	4450205S	4470205S
800	ADLS1835-24-ES-XXX	1835	0.754	1111	1.5	2872107C1E1	4450105	4450205S	4470205S
900	ADLS2105-24-ES-XXX	2105	0.757	1262	1.5	2872107C1E1	4450105	4450205S	4470205S
1000	ADLS2325-24-ES-XXX	2325	0.760	1413	1.5	2872107C1E1	4450105	4450205S	4470205S

For longer span applications, contact Draka for specific cable designs

Value Innovation for your Next Generation Access Network

Draka Communications Americas
2512 Penny Road | Claremont | North Carolina 28610-0039
800.879.9862 | International 828.459.8895 | sales@drakaamericas.com

**Single HDPE Jacket (without track resistance) SafeStrain Design
NESC Medium Load**

ADLS

6-72 fibers Short Span ADSS design is recommended

84 to 144F

Span Distance (ft)	Cable Part Number	Maximum Rate Cable Load (MRCL) (lbf)	Cable OD (inches)	Installation Load (lbf)	Installation Sag	Dead End	AI Support span < 600 ft	AI Suspension w/o SSR (< 600 ft)	AI Suspension with SSR
≤500	ADLS1025-24-ES-XXX	1025	0.492	351	1.5	2872004C1E1	4450100	4450200S	4470200S
600	ADLS1155-24-ES-XXX	1155	0.495	425	1.5	2872004C1E1	4450100	4450200S	4470200S
700	ADLS1385-24-ES-XXX	1385	0.500	505	1.5	2872100C1E1	4450100	4450200S	4470200S
800	ADLS1565-24-ES-XXX	1565	0.503	584	1.5	2872100C1E1	4450100	4450200S	4470201S
900	ADLS1785-24-ES-XXX	1785	0.508	668	1.5	2872100C1E1	4450100	4450200S	4470201S
1000	ADLS2015-24-ES-XXX	2015	0.513	754	1.5	2872101C1E1	4450100	4450200S	4470201S

156 to 216F

Span Distance (ft)	Cable Part Number	Maximum Rate Cable Load (MRCL) (lbf)	Cable OD (inches)	Installation Load (lbf)	Installation Sag	Dead End	AI Support span < 600 ft	AI Suspension w/o SSR (< 600 ft)	AI Suspension with SSR
≤400	ADLS1025-24-ES-XXX	1025	0.616	400	1.5	2872008C1E1	4450102	4450202S	4470202S
500	ADLS1155-24-ES-XXX	1155	0.619	503	1.5	2872008C1E1	4450102	4450202S	4470202S
600	ADLS1385-24-ES-XXX	1385	0.622	611	1.5	2872008C1E1	4450102	4450202S	4470202S
700	ADLS1655-24-ES-XXX	1655	0.626	722	1.5	2872104C1E1	4450103	4450203S	4470203S
800	ADLS1875-24-ES-XXX	1875	0.630	834	1.5	2872104C1E1	4450103	4450203S	4470203S
900	ADLS2105-24-ES-XXX	2105	0.634	948	1.5	2872104C1E1	4450103	4450203S	4470203S
1000	ADLS2375-24-ES-XXX	2375	0.638	1067	1.5	2872104C1E1	4450103	4450203S	4470203S

228 to 288F

Span Distance (ft)	Cable Part Number	Maximum Rate Cable Load (MRCL) (lbf)	Cable OD (inches)	Installation Load (lbf)	Installation Sag	Dead End	AI Support span < 600 ft	AI Suspension w/o SSR (< 600 ft)	AI Suspension with SSR
≤375	ADLS1025-24-ES-XXX	1025	0.743	506	1.5	2872011C1E1	4450104	4450204S	4470205S
400	ADLS1115-24-ES-XXX	1115	0.745	542	1.5	2872011C1E1	4450104	4450204S	4470205S
500	ADLS1385-24-ES-XXX	1385	0.748	684	1.5	2872011C1E1	4450105	4450204S	4470205S
600	ADLS1655-24-ES-XXX	1655	0.752	828	1.5	2872011C1E1	4450105	4450205S	4470205S
700	ADLS1925-24-ES-XXX	1925	0.755	975	1.5	2872107C1E1	4450105	4450205S	4470205S
800	ADLS2235-24-ES-XXX	2235	0.759	1127	1.5	2872107C1E1	4450105	4450205S	4470205S
900	ADLS2505-24-ES-XXX	2505	0.762	1279	1.5	2872107C1E1	4450105	4450205S	4470205S

For longer span applications, contact Draka for specific cable designs

Value Innovation for your Next Generation Access Network

Draka Communications Americas
2512 Penny Road | Claremont | North Carolina 28610-0039
800.879.9862 | International 828.459.8895 | sales@drakaamericas.com

**Single HDPE Jacket (without track resistance) SafeStrain Design
NESC Heavy Load**

ADLS

6-72 fibers Short Span ADSS design is recommended

84 to 144F

Span Distance (ft)	Cable Part Number	Maximum Rate Cable Load (MRCL) (lbf)	Cable OD (inches)	Installation Load (lbf)	Installation Sag	Dead End	AI Support span < 600 ft	AI Suspension w/o SSR (< 600 ft)	AI Suspension with SSR
≤300	ADLS1025-12-ES-XXX	1025	0.492	210	1.5	2872004CIE1	4450100	4450200S	4470200S
400	ADLS1295-24-ES-XXX	1295	0.498	286	1.5	2872004CIE1	4450100	4450200S	4470200S
500	ADLS1605-24-ES-XXX	1605	0.504	266	1.5	2872004CIE1	4450100	4450200S	4470201S
600	ADLS1925-24-ES-XXX	1925	0.511	450	1.5	2872005CIE1	4450100	4450200S	4470201S
700	ADLS2285-24-ES-XXX	2285	0.518	538	1.5	2872101CIE1	4450100	4450200S	4470201S
800	ADLS2615-24-ES-XXX	2615	0.525	630	1.5	2872101CIE1	4450100	4450200S	4470201S

156 to 216F

Span Distance (ft)	Cable Part Number	Maximum Rate Cable Load (MRCL) (lbf)	Cable OD (inches)	Installation Load (lbf)	Installation Sag	Dead End	AI Support span < 600 ft	AI Suspension w/o SSR (< 600 ft)	AI Suspension with SSR
≤200	ADLS1025-24-ES-XXX	1025	0.616	200	1.5	2872008CIE1	4450102	4450202S	4470202S
300	ADLS1115-24-ES-XXX	1115	0.618	301	1.5	2872008CIE1	4450102	4450202S	4470202S
400	ADLS1475-24-ES-XXX	1475	0.624	409	1.5	2872008CIE1	4450102	4450202S	4470202S
500	ADLS1835-24-ES-XXX	1835	0.629	520	1.5	2872008CIE1	4450103	4450203S	4470203S
600	ADLS2195-24-ES-XXX	2195	0.635	635	1.5	2872008CIE1	4450103	4450203S	4470203S
700	ADLS2555-24-ES-XXX	2555	0.641	753	1.5	2872104CIE1	4450103	4450203S	4470203S

228 to 288F

Span Distance (ft)	Cable Part Number	Maximum Rate Cable Load (MRCL) (lbf)	Cable OD (inches)	Installation Load (lbf)	Installation Sag	Dead End	AI Support span < 600 ft	AI Suspension w/o SSR (< 600 ft)	AI Suspension with SSR
≤250	ADLS1025-24-ES-XXX	1025	0.743	338	1.5	2872011CIE1	4450104	4450204S	4470205S
300	ADLS1245-24-ES-XXX	1245	0.746	408	1.5	2872011CIE1	4450104	4450204S	4470205S
400	ADLS1655-24-ES-XXX	1655	0.752	552	1.5	2872011CIE1	4450105	4450205S	4470205S
500	ADLS2105-24-ES-XXX	2105	0.757	701	1.5	2872011CIE1	4450105	4450205S	4470205S
600	ADLS2505-24-ES-XXX	2505	0.762	853	1.5	2872011CIE1	4450105	4450205S	4470205S

For longer span applications, contact Draka for specific cable designs

Value Innovation for your Next Generation Access Network

Draka Communications Americas
2512 Penny Road | Claremont | North Carolina 28610-0039
800.879.9862 | International 828.459.8895 | sales@drakaamericas.com

Dual HDPE Jacket (without track resistance) SafeStrain Design ADLD

Fiber Count	Span ft (m)	NESC Heavy, 1% Sag		NESC Medium, 1% Sag		NESC Light, 1% Sag	
		Diameter inches (mm)	Weight lb/kft (kg/km)	Diameter inches (mm)	Weight lb/kft (kg/km)	Diameter inches (mm)	Weight lb/kft (kg/km)
2 - 72	200 (61)	0.53 (13.4)	97 (144)	0.52 (13.3)	95 (142)	0.52 (13.3)	95 (142)
	400 (122)	0.55 (13.9)	103 (153)	0.53 (13.5)	98 (146)	0.53 (13.4)	97 (144)
	600 (183)	0.57 (14.4)	109 (162)	0.55 (13.9)	103 (153)	0.54 (13.6)	99 (148)
	800 (244)	0.60 (15.3)	122 (182)	0.56 (14.2)	106 (158)	0.55 (13.9)	103 (153)
	1000 (305)	0.64 (16.2)	135 (201)	0.57 (14.5)	111 (165)	0.56 (14.1)	106 (157)
	1200 (366)	0.67 (17.0)	147 (218)	0.60 (15.3)	122 (182)	0.57 (14.4)	110 (163)
	1600 (488)			0.65 (16.5)	140 (208)	0.62 (15.7)	127 (189)
	2000 (610)			0.69 (17.6)	157 (234)	0.65 (16.6)	141 (210)
74 - 144	200 (61)	0.57 (14.6)	114 (169)	0.57 (14.6)	114 (169)	0.57 (14.6)	114 (169)
	400 (122)	0.59 (15.1)	120 (179)	0.58 (14.8)	116 (172)	0.58 (14.6)	114 (170)
	600 (183)	0.61 (15.5)	127 (188)	0.59 (15.1)	120 (179)	0.59 (14.9)	117 (175)
	800 (244)	0.65 (16.5)	141 (210)	0.60 (15.4)	124 (184)	0.60 (15.1)	121 (180)
	1000 (305)	0.68 (17.3)	154 (229)	0.62 (15.8)	130 (193)	0.60 (15.4)	124 (184)
	1200 (366)	0.71 (17.9)	164 (244)	0.65 (16.5)	141 (210)	0.62 (15.7)	129 (192)
	1600 (488)	0.77 (19.6)	192 (286)	0.70 (17.8)	161 (240)	0.67 (16.9)	147 (219)
	2000 (610)			0.74 (18.8)	179 (267)	0.71 (17.9)	164 (244)
146 - 216	200 (61)	0.70 (17.8)	157 (234)	0.70 (17.8)	156 (233)	0.70 (17.8)	156 (233)
	400 (122)	0.72 (18.3)	165 (245)	0.71 (18.0)	160 (238)	0.70 (17.9)	159 (236)
	600 (183)	0.75 (19.0)	178 (265)	0.72 (18.3)	166 (247)	0.72 (18.2)	163 (243)
	800 (244)	0.77 (19.6)	189 (281)	0.73 (18.6)	171 (254)	0.73 (18.4)	168 (250)
	1000 (305)	0.80 (20.4)	202 (301)	0.76 (19.3)	182 (272)	0.74 (18.7)	172 (255)
	1200 (366)	0.83 (21.0)	215 (319)	0.78 (19.9)	193 (288)	0.76 (19.4)	184 (274)
	1600 (488)			0.83 (21.0)	215 (319)	0.80 (20.4)	202 (301)
	2000 (610)			0.87 (22.0)	235 (349)	0.84 (21.3)	220 (327)
218 - 288	200 (61)	0.83 (21.1)	207 (308)	0.83 (21.0)	205 (305)	0.83 (21.0)	205 (305)
	400 (122)	0.85 (21.5)	216 (321)	0.84 (21.3)	211 (313)	0.83 (21.2)	209 (311)
	600 (183)	0.87 (22.2)	229 (340)	0.85 (21.6)	218 (324)	0.84 (21.5)	215 (319)
	800 (244)	0.90 (22.9)	244 (363)	0.87 (22.2)	229 (340)	0.86 (21.7)	220 (327)
	1000 (305)	0.93 (23.5)	257 (382)	0.89 (22.6)	238 (354)	0.88 (22.3)	232 (345)
	1200 (366)	0.95 (24.2)	272 (404)	0.91 (23.2)	249 (371)	0.90 (22.8)	242 (360)
	1600 (488)			0.96 (24.3)	274 (408)	0.94 (23.8)	264 (393)
	2000 (610)					0.97 (24.7)	284 (422)

Contact your Draka representative for information about designs with alternative span requirements or cable diameters. Cable diameters and weights may vary depending on specific span design requirements.

Value Innovation for your Next Generation Access Network

Draka Communications Americas
 2512 Penny Road | Claremont | North Carolina 28610-0039
 800.879.9862 | International 828.459.8895 | sales@drakaamericas.com

Ordering Check List

- 1 Installation Location: City _____ State _____
- 2 Cable Length Marking Feet Meters
- 3 # of Jackets: Single Jacket Dual Jacket
- 4 Number of Fibers: _____
- 5 Fiber Type & Grade: _____
- 6 Max. Span Length: (ft or m) _____
- 7 Installation Sag: 1.5% Other (Please Specify) _____
- 8 NESC Loading Condition: Light Medium Heavy Other (Define Ice & Wind Load) _____
- 9 Line Voltage: None
 Distribution Line
 Transmission Line _____ Phase to Phase (kV) _____ Phase to Ground _____
- 10 Fiber Strain: Safe Strain Zero Strain

Table 2 - Fiber Information									
5	Fiber Type	Description	7	Fiber Grade	Wavelength (nm)	Attenuation (dB/km)	Bandwidth (MHz km)	1 GbE Distance (meters)	10 GbE Distance (meters)
Singlemode	ES	Enhanced Single-Mode (ITU G.652.C & D)	E1		1310/1383/1550	0.4/0.4/0.3			
	BB	BendBright (ITU G.657.A1 & G.652)	E3		1310/1383/1550	0.35/0.35/0.25			
	BX	BendBright-XS (ITU G.657.B2 & A2 & G.652.D)	E3		1310/1383/1550	0.35/0.35/0.25			
	TU	TeraLight Ultra	NA		1310/1550	0.40/0.25			
	LA	NZDSF-LA	N1		1550	0.25			
Multimode	6S	OM1 (62.5µm)	M2		850/1300	3.5/1.0	200/500	300/550	33/___
	5E	MaxCap-BB-OM2+ (50µm)	M3		850/1300	3.0/1.0	700/500	800/550	150/___
	5F	MaxCap-BB-OM3 (50µm)	M3		850/1300	3.0/1.0	1500/500	1000/550	300/___
	5G	MaxCap-BB-OM4 (50µm)	M3		850/1300	3.0/1.0	3500/500	1100/550	550/___

Value Innovation for your Next Generation Access Network

Draka Communications Americas
 2512 Penny Road | Claremont | North Carolina 28610-0039
 800.879.9862 | International 828.459.8895 | sales@drakaamericas.com