

June 2008




PINPOINT® Duct

Features & Benefits

- Wire is 18 awg copper clad 30.041 ohm/1,000 ft 68°F.
- Size ranges from 1/2" (13mm) to 2" (51mm).
- Available Smooth in/Smooth out and Smooth out/Ribbed in.
- Available with Silicore permanent lining.
- No special tools required.
- Sequential markings in feet or meters.
- Easily connected with standard couplers.

GENERAL INFORMATION

PINPOINT® is a proven, reliable method for locating buried duct. The PINPOINT® wire is encased in HDPE providing a corrosion-resistant conductor. Ideal for plow, open trench or directional bores. It is extremely functional at a wide range of frequencies, compatible with industry standard locating equipment. No special tools are required to couple the duct and the PINPOINT® wire - current coupling methods can be utilized

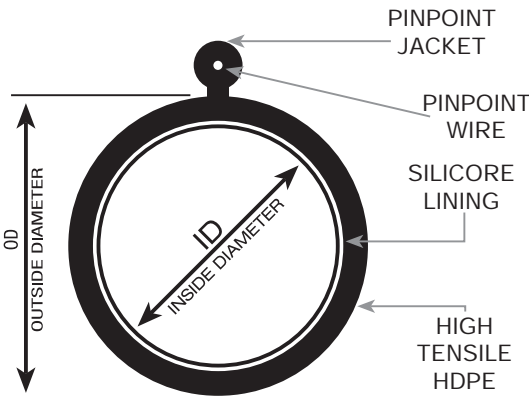

PINPOINT® duct is available on steel reels or coils.



Pin Point Splice Kit



DURATHANE

PINPOINT® is available in DURATHANE fire retardant material.



ROPE



TAPE

PINPOINT® is available with a variety of ropes and tapes.



A full line of accessories is available for easier and faster duct installation.



Web Slitter



NOTE: A-D Technologies has made every attempt to assure that the information contained in this product bulletin is accurate. The information supplied may change without notice. This information is intended to inform the reader of the typical characteristics of the pipe and accessories that are described and should not be considered complete with regard to design considerations. Contact a representative regarding any questions about this document and to determine if the information contained within is current.

ALL PROPRIETARY RIGHTS RESERVED